Silo Venting Filters












CUTTING-EDGE DUST FILTRATION TECHNOLOGY

SILOTOP[®] zer[®] is a cylindrically shaped dust collector for venting pneumatically filled silos. Its stainless steel body contains vertically mounted POLYPLEAT[®] filter elements. The air jet cleaning system is integrated into the hinged weather protection cover.

Dust separated from the air flow by special filter elements drops back into the silo after an integrated automatic pulse-jet air cleaning system has removed it from the filter media.

Air filtration capacity has been increased by 30% due to new high performance filter media. The result is lower filtering surface required, lower pressure drop, and dust emission of less than 1mg/Nm³.

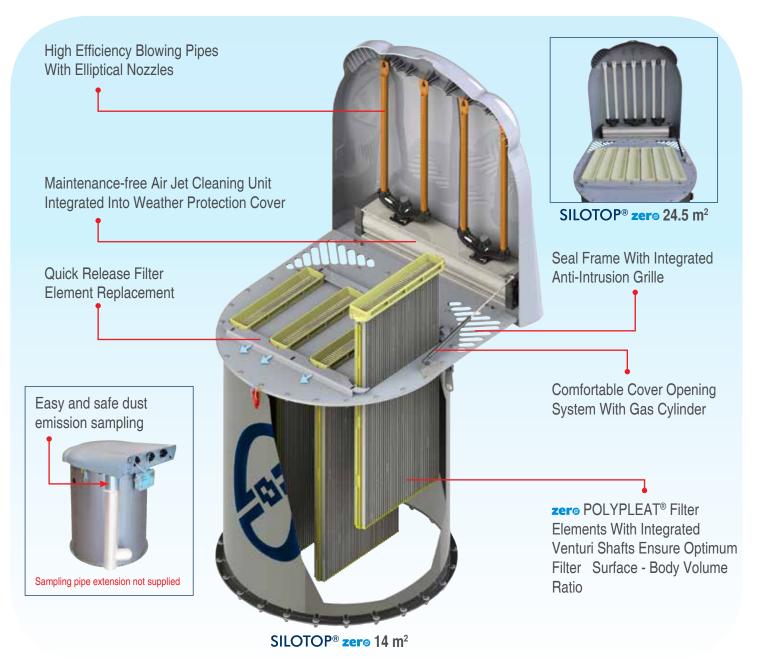

Overall Dimensions

CODE	BODY Ø mm [in]	FILTER SURFACE m² [sq ft]	MAX. HEIGHT WHEN CLOSED mm [in]	MAX. HEIGHT WHEN OPEN mm [in]	WEIGHT kg [lb]
SILAB 14	800 [31.5]	14.0 [150]	1,100 [43.3]	1,850 [72.8]	68 [150]
SILAB 24	800 [31.5]	24.5 [264]	1,100 [43.3]	1,850 [72.8]	79 [174]

Features


- Dust emission < 1 mg/Nm³ due to EPA class IFAcertified filter media
- Air flow performance increased by 30%
- **Compact** 800 mm (30 in) diameter stainless steel body with bottom flange
- Maintenance-free air jet cleaning unit integrated into weather protection cover
- Maintenance height = 1,100 mm (3.6 ft)
- Extended durability due to zer@ filter media
 POLYPLEAT[®] elements
- Safe weather protection cover with lockable quick release

Easy and Safe Maintenance



Benefits

- |X| Perfectly accessible due to compact design
- Construction
- Lightweight POLYPLEAT[®] filter elements easily replaceable by one operator only
 - Eco-friendly zero filter media

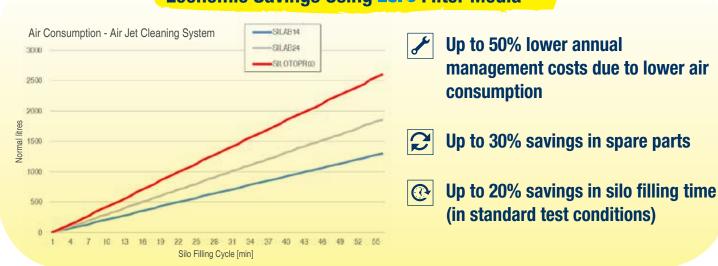

Economic Savings Using zero Filter Media

Accessories

- Weld-on bottom ring
- Multifunctional electronic differential pressure meter
- · Winter protection for solenoid valves
- Emission sampling kit

Application



VAM®





www.wamgroup.com